
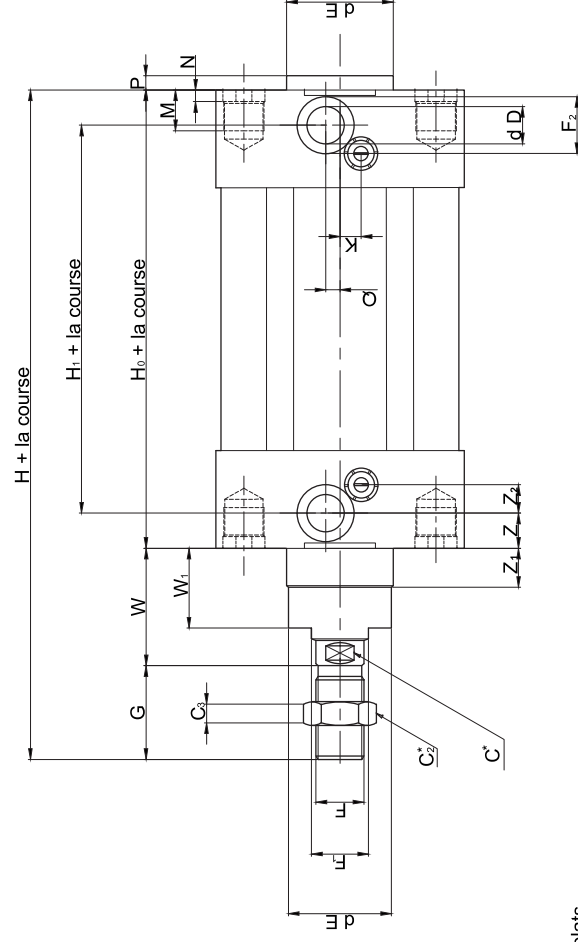
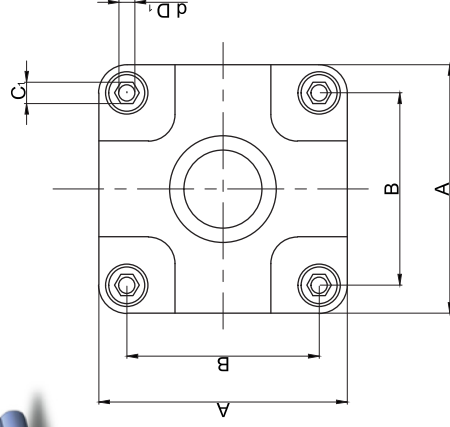


DIMENSIONS DES VERINS ISO 6431 PC

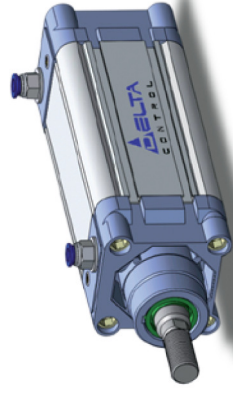

* : cotes sur plats

Ø	cotes(mm)																									
	A	B	C*	C ₁	C ₂ *	C ₃	dD	dD ₁	dE	F	F ₁	F ₂	G	H	H ₀	H ₁	K	M	N	P	Q	W	W ₁	Z	Z ₁	Z ₂
alésages (mm)																										
32	47	32.5	10	6	16	5	G1/8	M6	30	M10x1.25	12	15	22	142	94	74	6	9	4.5	5	4	26	16	10	7	10
40	53	38	13	6	18	6	G1/4	M6	35	M12x1.25	16	19	24	159	105	81	6	9	4.5	5	4	30	20	12	9	10
50	65	46.5	17	8	24	8	G1/4	M8	40	M16x1.5	20	19	32	175	106	78	6	12	5.5	5	6	37	25	14	14	10
63	75	56.5	17	8	24	8	G3/8	M8	45	M16x1.5	20	23	32	190	121	89	6	12	5.5	5	6	37	25	16	14	10
80	95	72	22	10	30	10	G3/8	M10	45	M20x1.5	25	23	40	214	128	92	10	16	5.5	8	7	46	33	18	12	12
100	115	89	22	10	30	10	G1/2	M10	55	M20x1.5	25	27	40	229	138	98	10	16	5.5	8	7	51	38	20	14	12
125	140	110	27	12	41	13.5	G1/2	M12	60	M27x2	32	27	50	279	160	110	12	19	6.5	8	8	69	45	25	21	10