
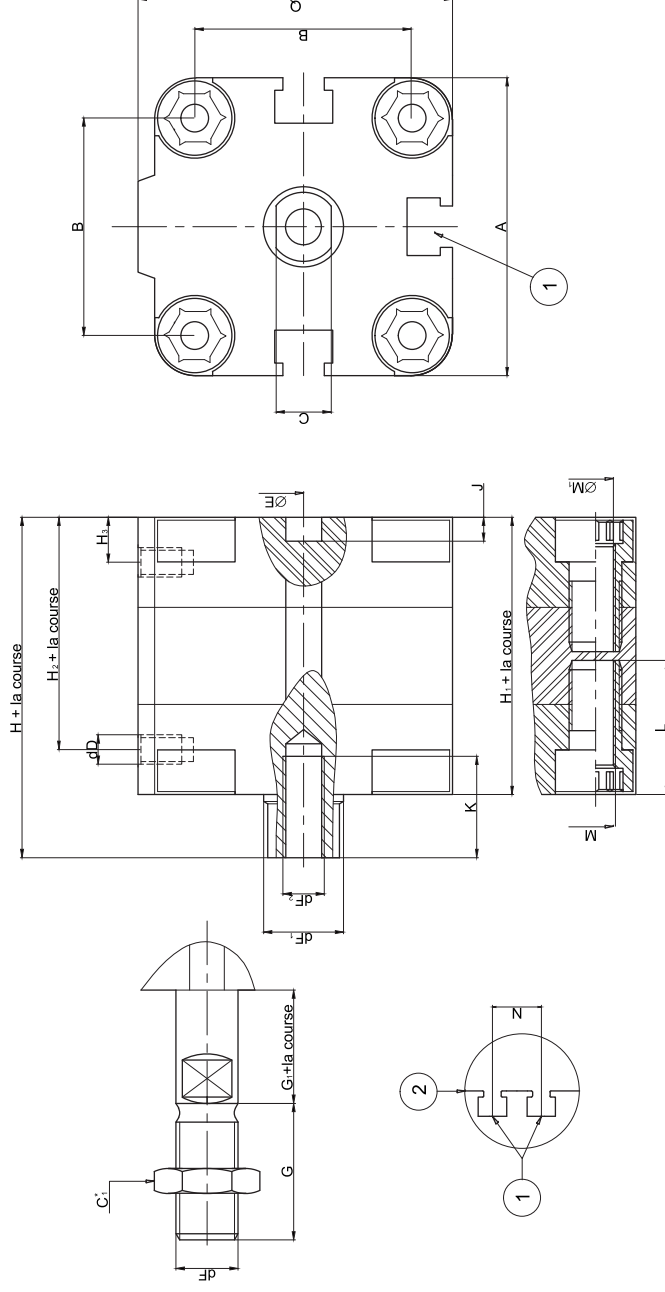


DIMENSIONS DES VERINS COMPACT AT





* : Cotes sur plats

1: Rainure pour le montage des unités de détection

2 : Rainure pour les vérins Ø32 à Ø80

Ø alésages (mm)	Cotes (mm)																				ENTRAXES	
	A	B	C	C ₁	dD	dE	dF	dF ₁	dF ₂	G	G ₁	H	H ₁	H	H ₃	J	K	L	M	ØM ₁		N
12	29	18	5	10	M5	6	M6	6	M3	16	4.5	42.5	38	30	8	4	8	18.5	M4	3.2	-	30
16	29	18	7	13	M5	6	M8	8	M4	20	4.5	42.5	38	30	8	4	10	18.5	M4	3.2	-	30
20	36.5	22	8	17	M5	6	M10x1.25	10	M5	22	4.5	42.5	38	30	8	4	12	18.5	M5	4.2	-	37.5
25	40.5	26	8	17	M5	6	M10x1.25	10	M5	22	5.5	45	39.5	31.5	8	4	12	19	M5	4.2	-	41.5
32	47	32	10	17	G1/8	6	M10x1.25	12	M6	22	6	50.5	44.5	37	7.5	4	14	21	M6	5.2	13	48.5
40	56	42	10	17	G1/8	6	M10x1.25	12	M6	22	6.5	52	45.5	38	7.5	4	14	22	M6	5.2	13	57.5
50	67	50	13	19	G1/8	6	M12x1.25	16	M8	24	7.5	53	45.5	38	7.5	4	16	22	M8	6.2	13	69
63	80	62	13	19	G1/8	8	M12x1.25	16	M8	24	7.5	57.5	50	42.5	7.5	4	16	27	M10	8.5	13	82
80	102	82	17	24	G1/8	8	M16x1.5	20	M10	32	8	64	56	47.5	8.5	4	20	27	M10	8.5	17	105

DIMENSIONS DES VERINS COMPACT MW

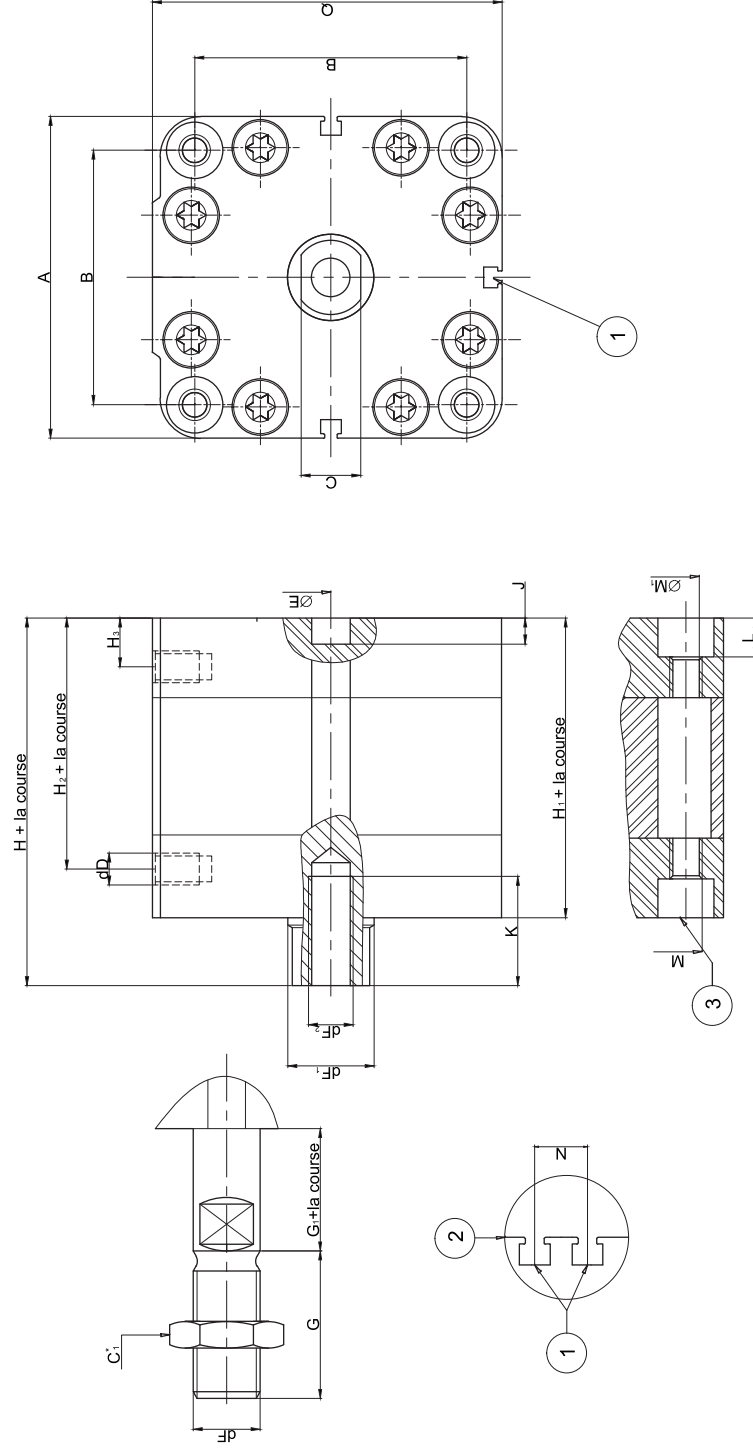

* : Cotes sur plats

1: Rainure pour le montage des unités de détection

2 : Rainure pour les vérins Ø63 à Ø100

3: Usinage pour vis de fixation du vérin

Ø alésages (mm)	Cotes(mm)																									
	B																M		ØM ₁		N	Q				
	A	UNITOP	ISO	C	C ₁ [*]	dD	dE	dF	dF ₁	dF ₂	G	G ₁	H	H ₁	H ₂	H ₃	J	K	L	UNITOP			ISO	UNITOP	ISO	
32	47	32	32.5	10	17	G1/8	6	M10x1.25	12	M6	22	6	50.5	44.5	37	7.5	4	14	4		M6	M6	5.2	5.2	13	48.5
40	56	42	38	10	17	G1/8	6	M10x1.25	12	M6	22	6.5	52	45.5	38	7.5	4	14	4.5		M6	M6	5.2	5.2	13	57.5
50	67	50	46.5	13	19	G1/8	6	M12x1.25	16	M8	24	7.5	53	45.5	38	7.5	4	16	4.5		M8	M8	6.2	6.2	13	69
63	80	62	56.5	13	19	G1/8	8	M12x1.25	16	M8	24	7.5	57.5	50	42.5	7.5	4	16	5.5		M10	M8	8.5	6.2	13	82
80	102	82	72	17	24	G1/8	8	M16x1.5	20	M10	32	8	64	56	47.5	8.5	4	20	5.5		M10	M10	8.5	8.5	17	105
100	123	103	89	22	30	G1/4	8	M20x1.5	25	M12	40	10	76.5	66.5	56	10.5	4	24	5.5		M10	M10	8.5	8.5	21	126